

Release to production.
Update the ELECTRICAL CHARACTERISTICS.

				8	Tape & Reel, 5000



4	5	

4 4			4	

4 4			4	

(1)

(2)

4 4			4	

(1)



(2)







PARAMETER	4		UNIT
R _{JA_EVM}			


(1)

(2)


(3)

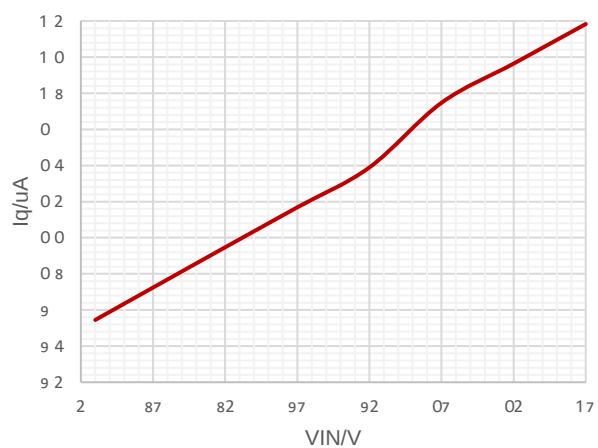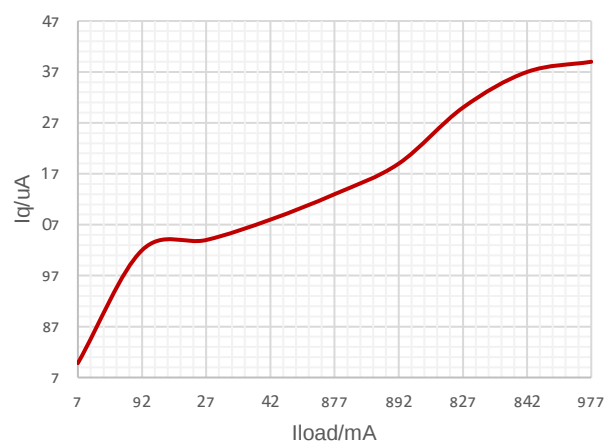

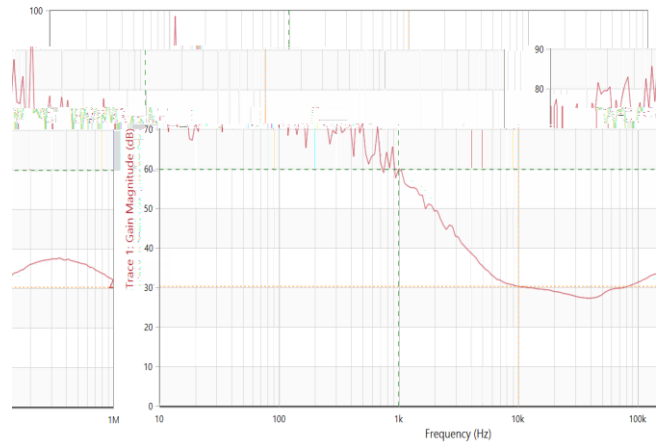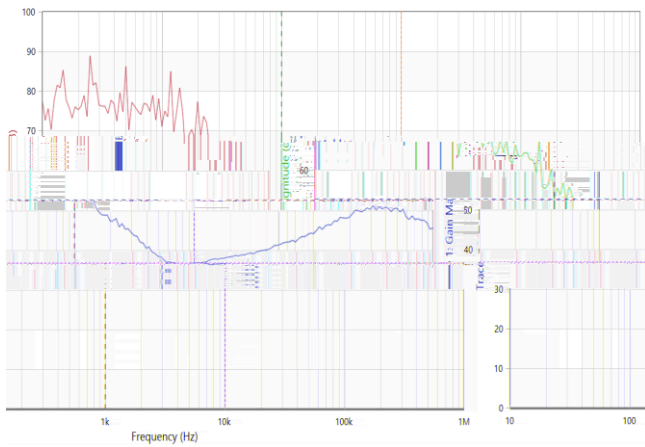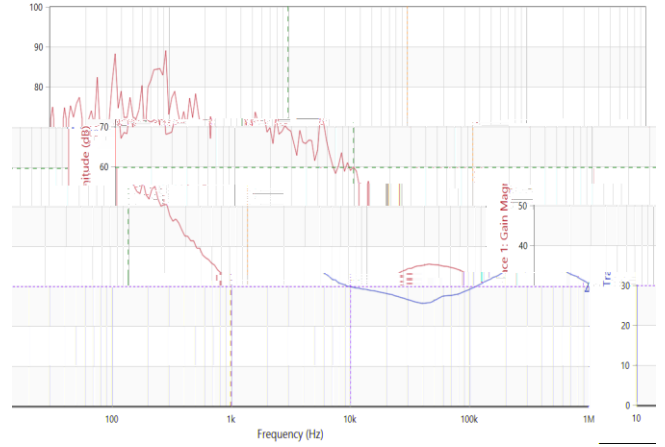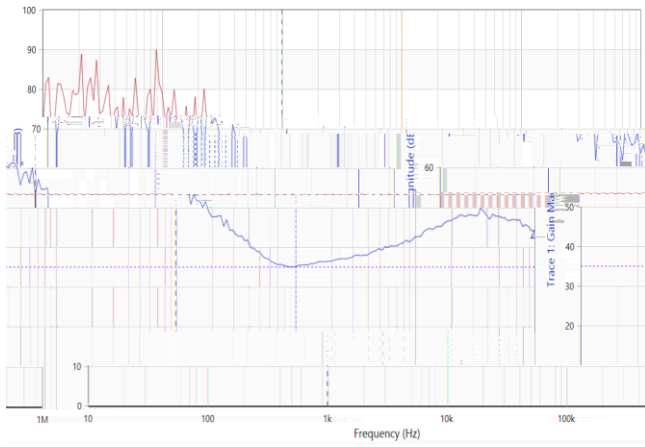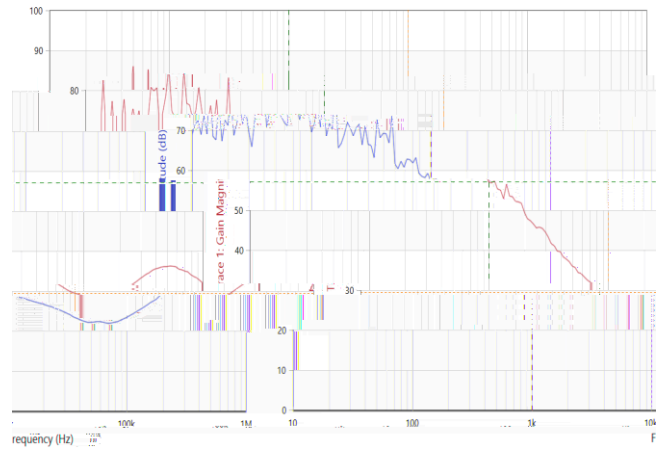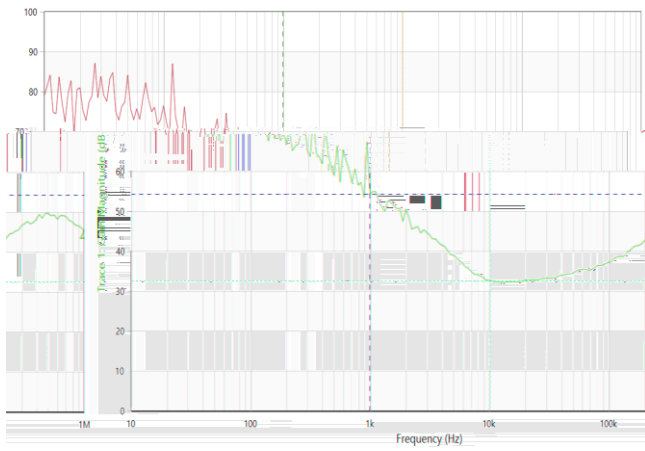

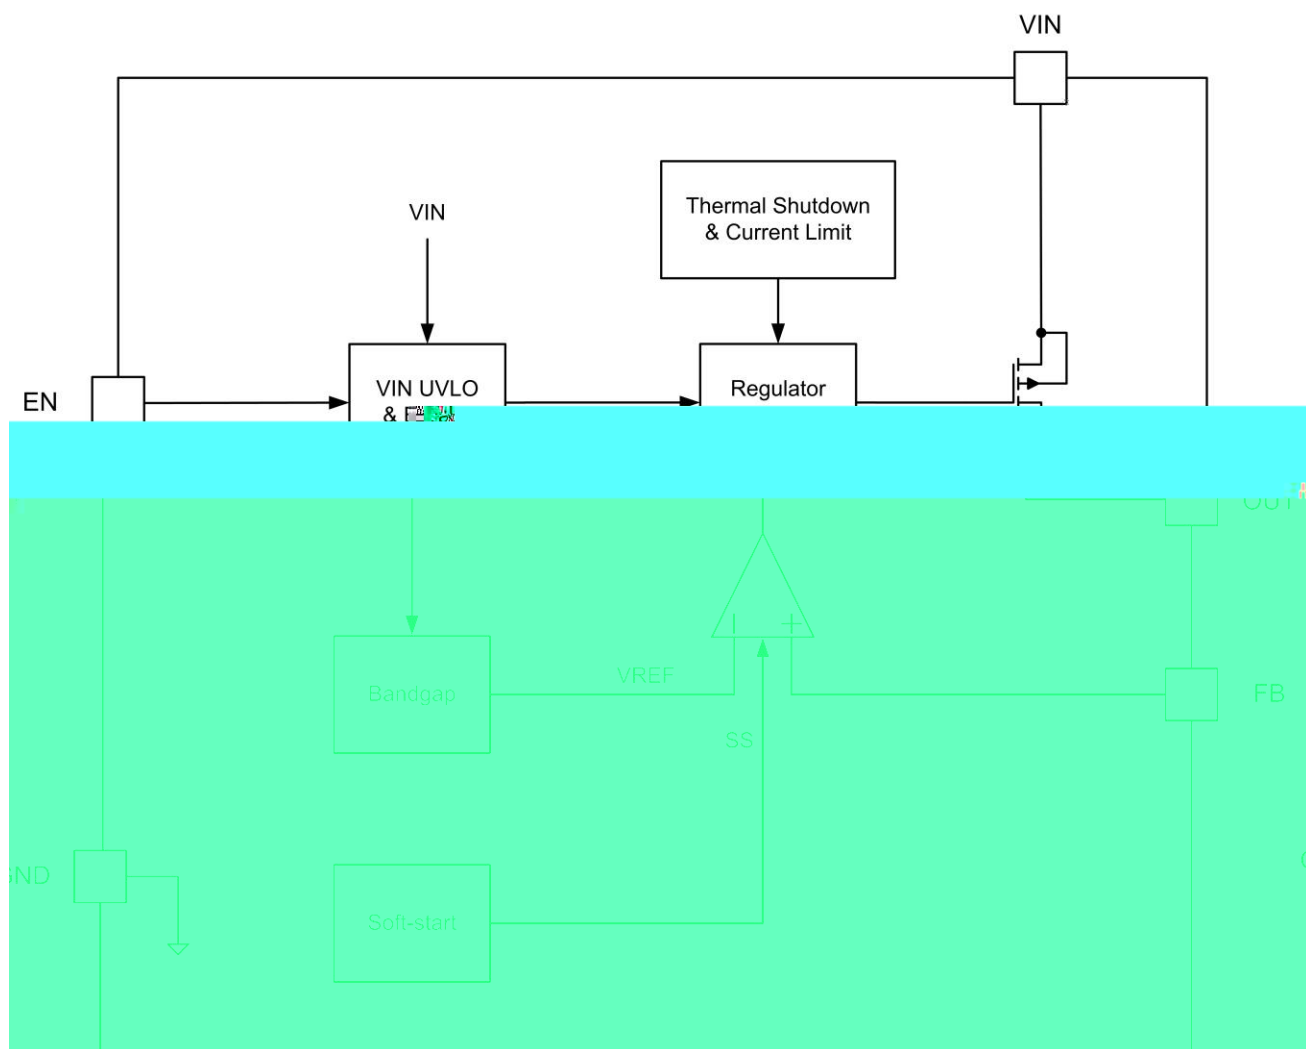


The SCT71402Q series products provide adjustable output version which can adjust the output voltage from 1.215V to 25V

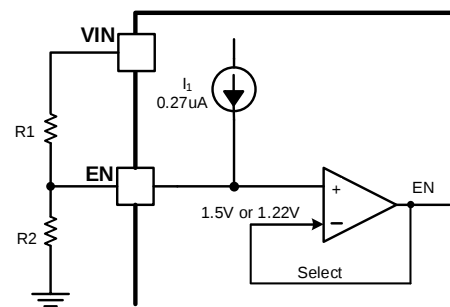





WAX & OILS

WAX & OILS

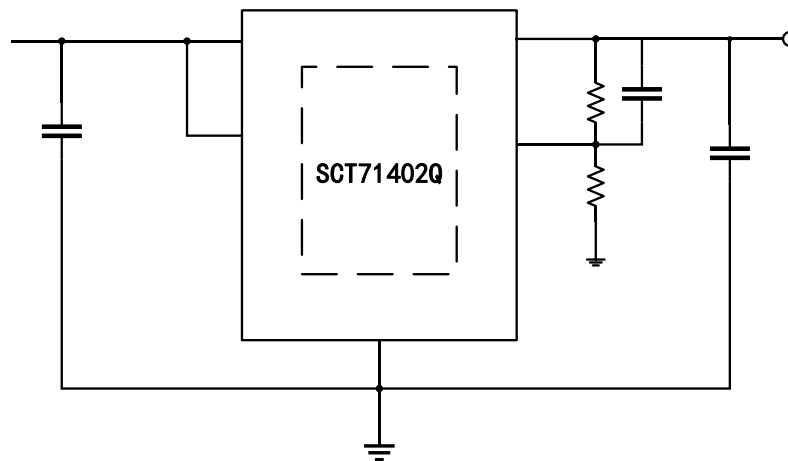


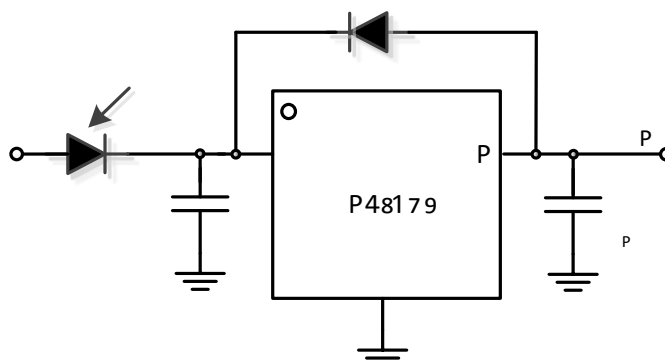




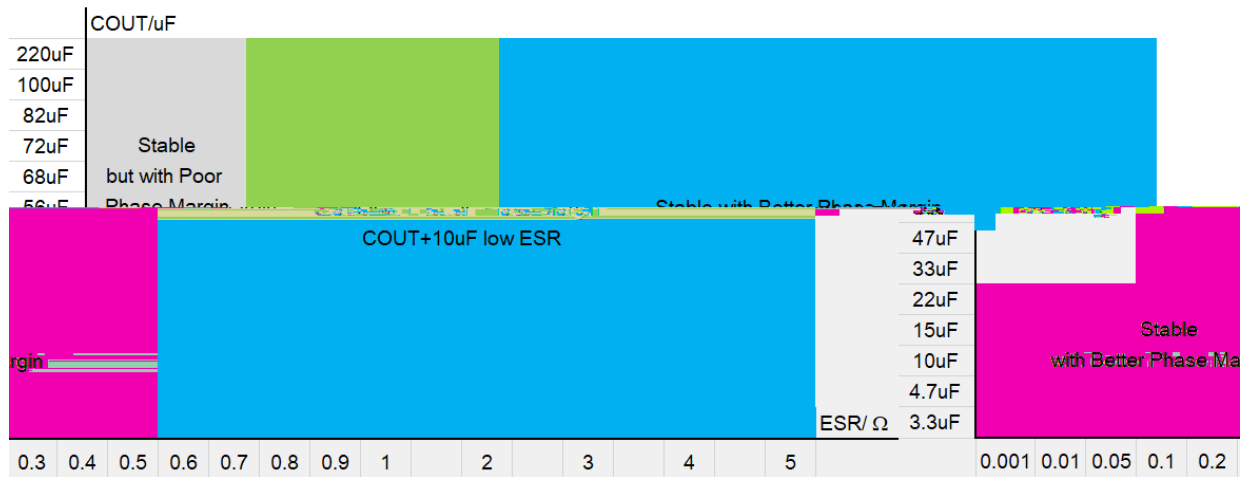








5


	40(	4(°C	4 °C

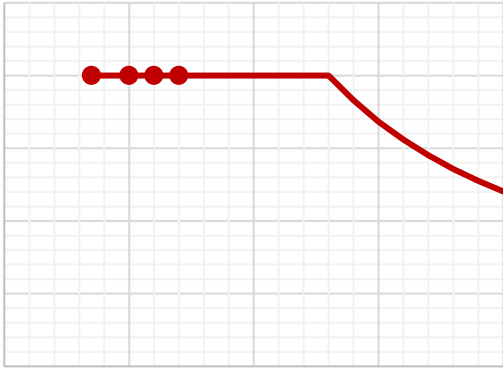


°C

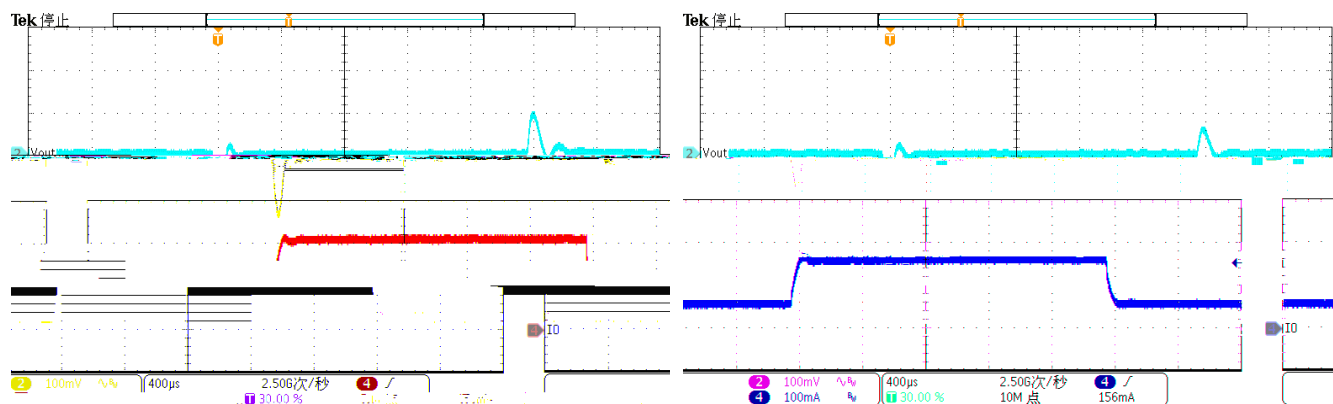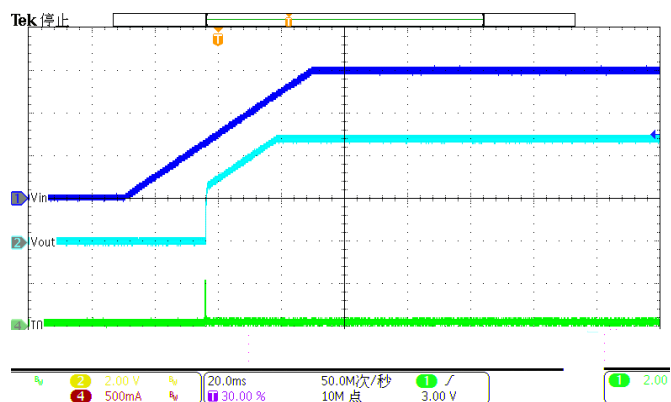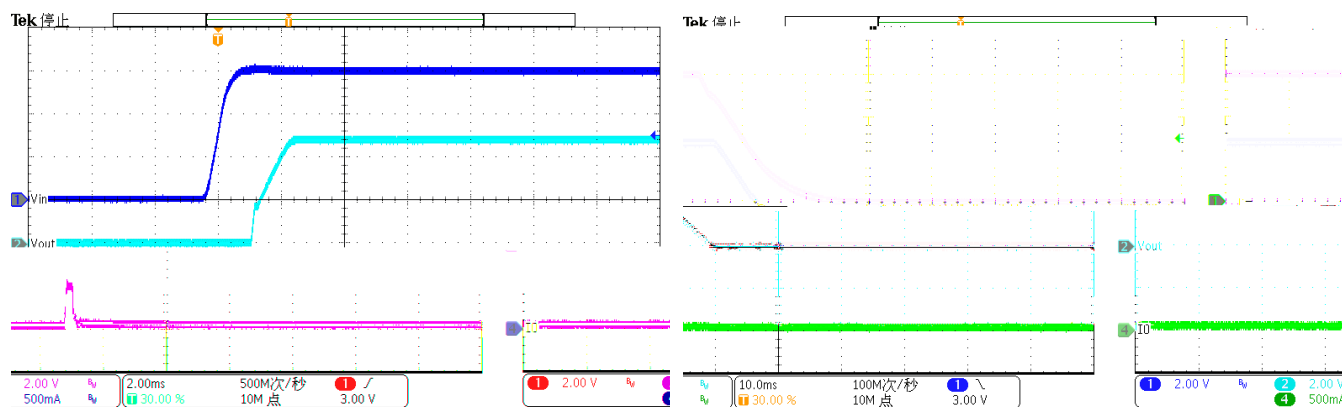

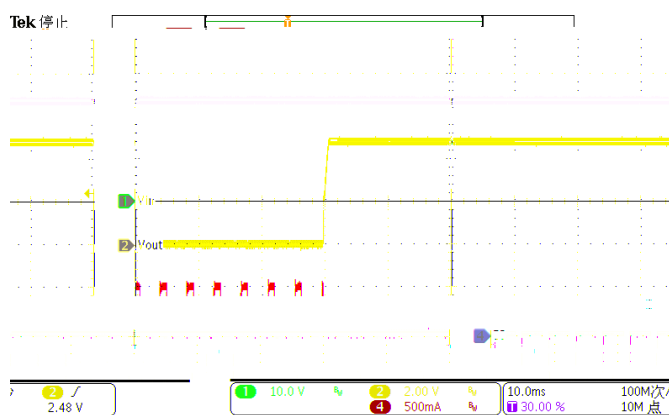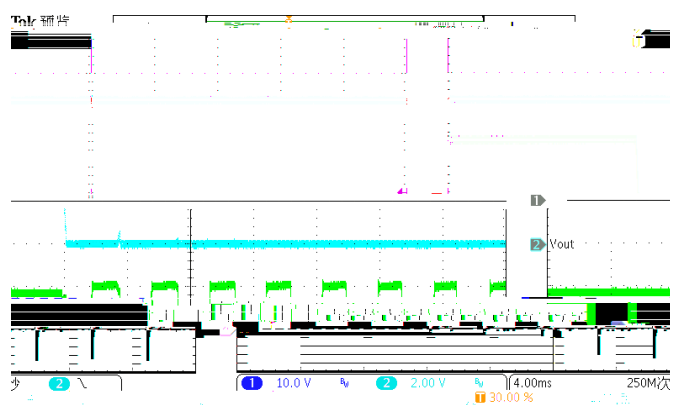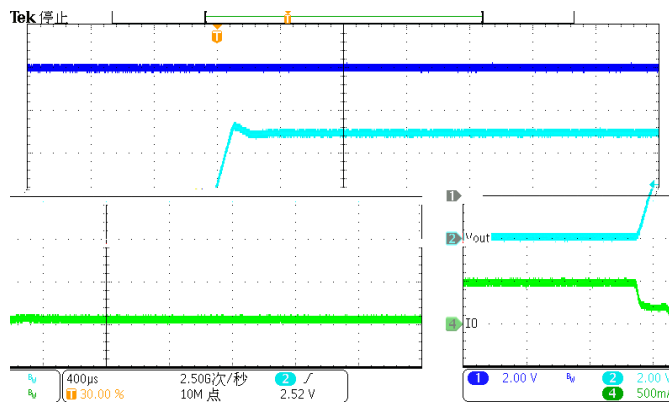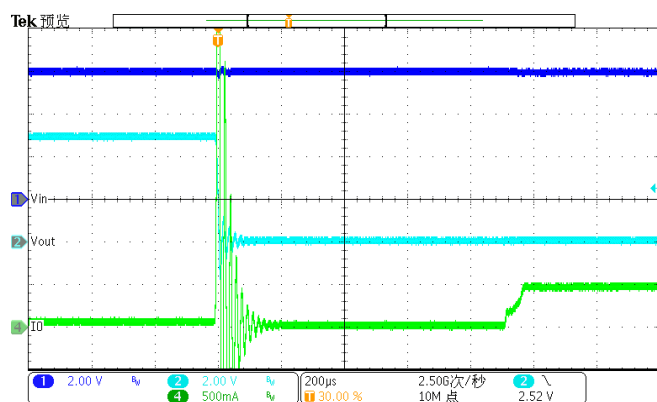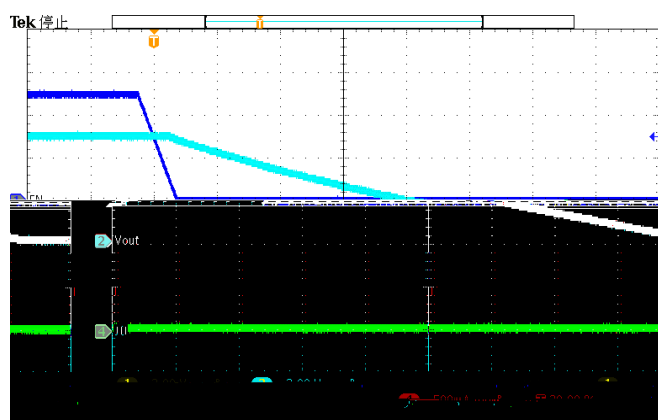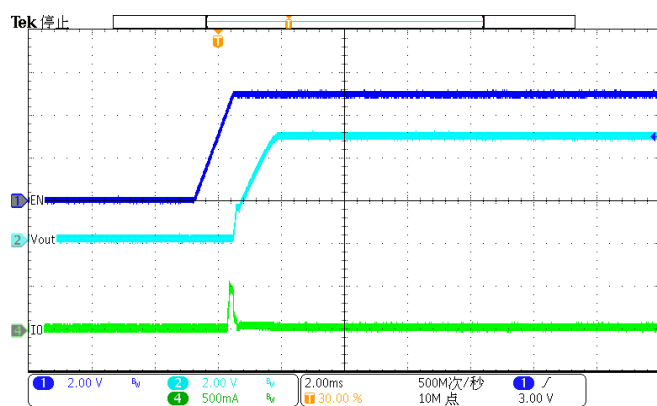


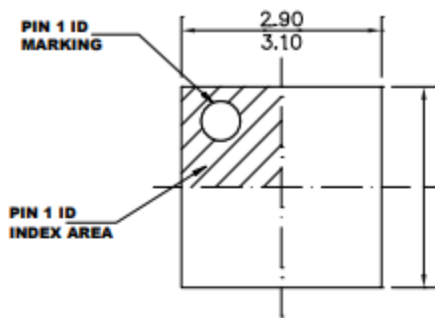


TOP VIEW

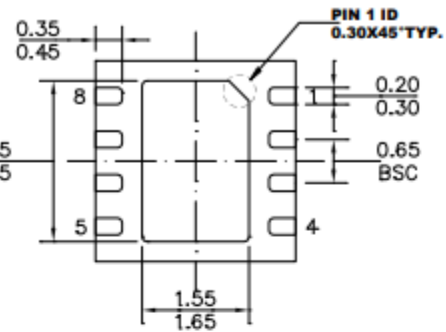

BOTTOM VIEW



SIDE VIEW

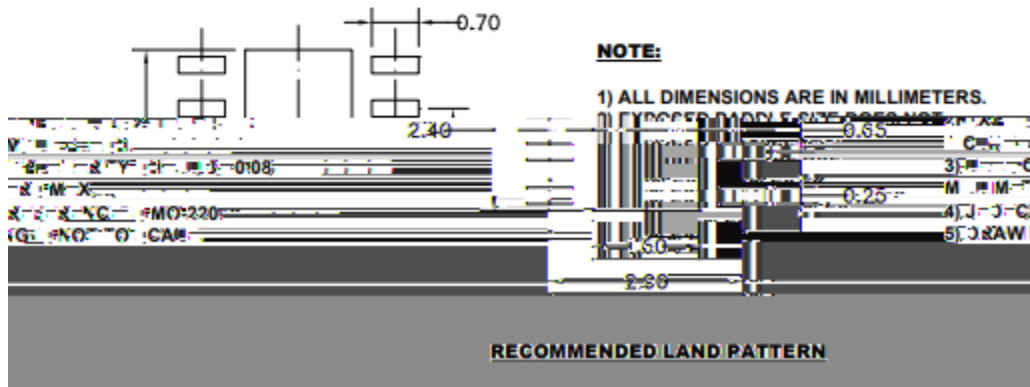

- 1.
- 2.
- 3.
- 4.
- 5.
- 6.

