

17V V A S c S DCDC C

FEATURES

APPLICATIONS

REVISION HISTORY

DEVICE ORDER INFORMATION

--	--	--	--	--	--	--

PIN FUNCTIONS

RECOMMENDED OPERATING CONDITIONS

	L			







ESD RATINGS

THERMAL INFORMATION


L

ELECTRICAL CHARACTERISTICS

TYPICAL CHARACTERISTICS

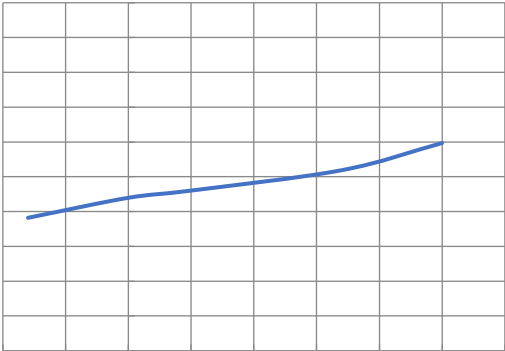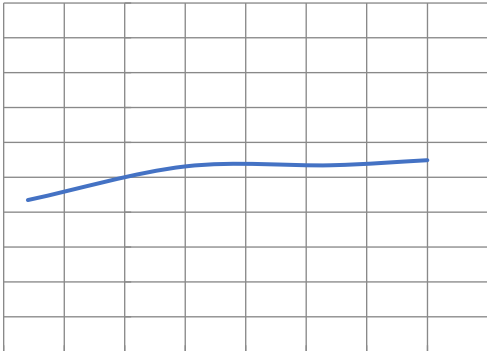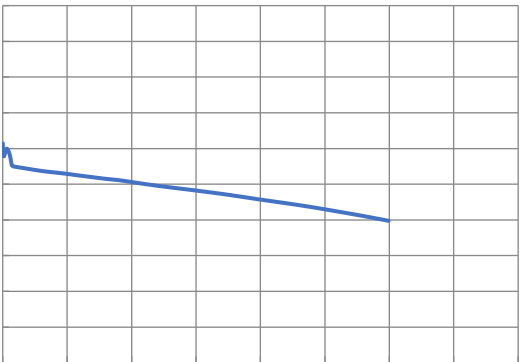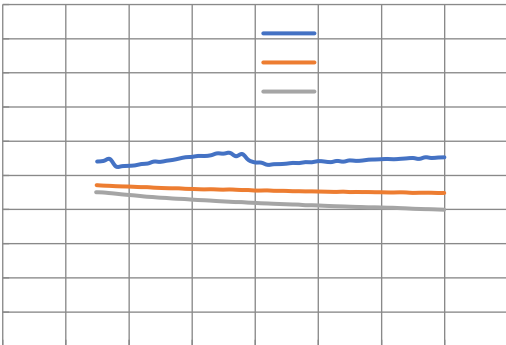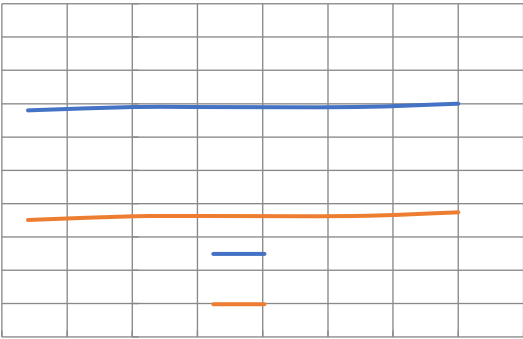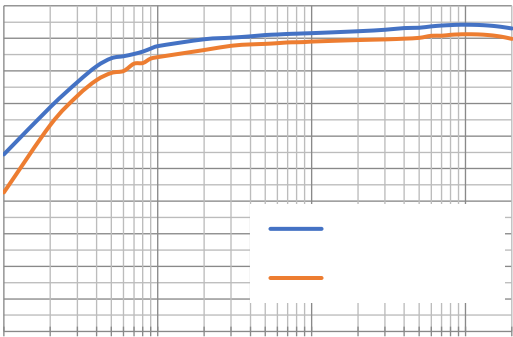

FUNCTIONAL BLOCK DIAGRAM

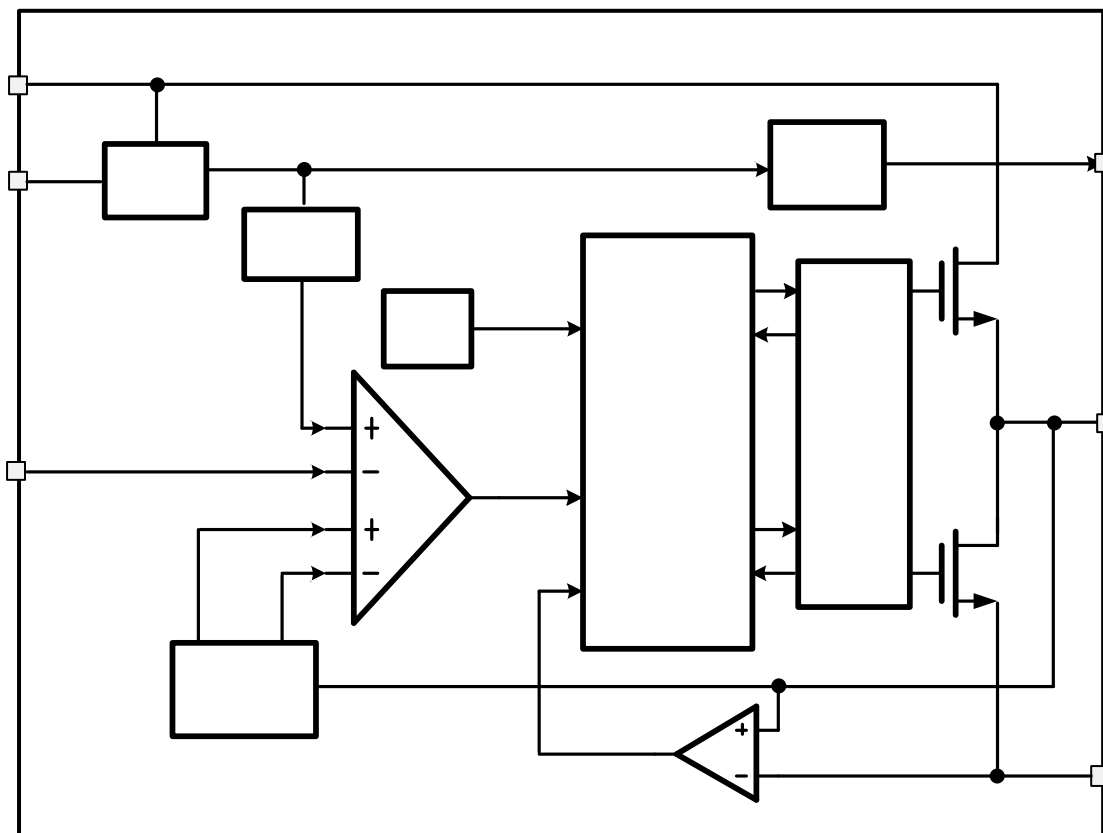

OPERATION


L

L

o

o

APPLICATION INFORMATION

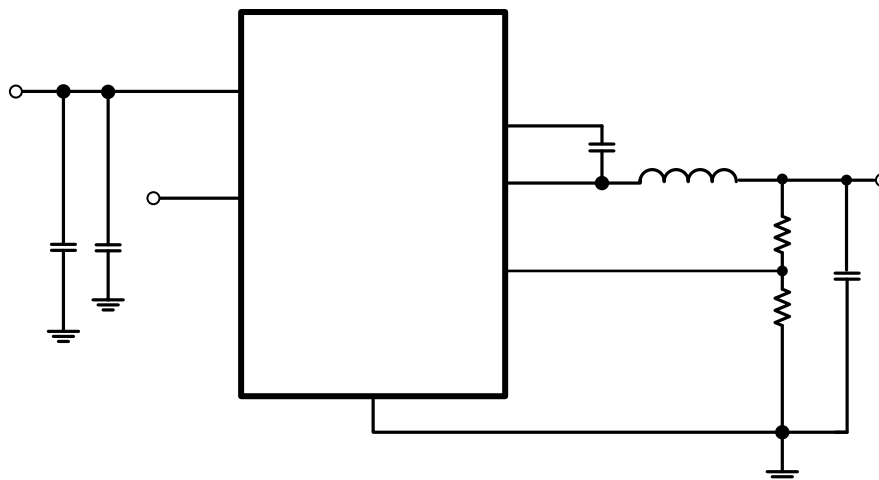


$$\Delta = \frac{1}{x} \times \frac{V_{OUT}}{V_{IN}} \times (1 - \frac{1}{x})$$

$$= \frac{\begin{matrix} \times & (& & - & &) \\ \times & & \times & & \times & \end{matrix}}{\times \quad \times \quad \times}$$

$$= \quad + \quad \times \frac{\quad}{2}$$

$$_1 = \frac{(\quad - \quad) \times _2}{\quad}$$



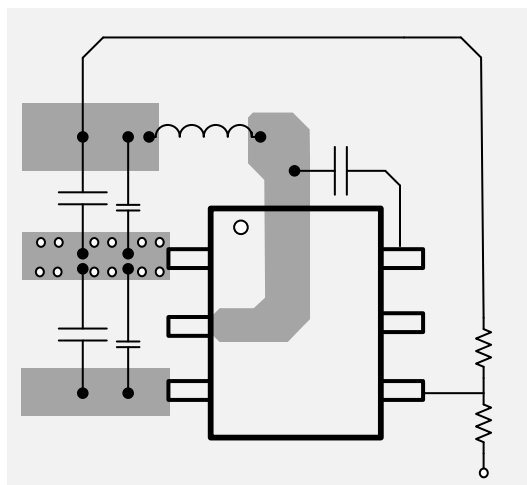





L

$$\left(\right) = \frac{125 -}{\theta JA}$$


L

L

PACKAGE INFORMATION TSOT

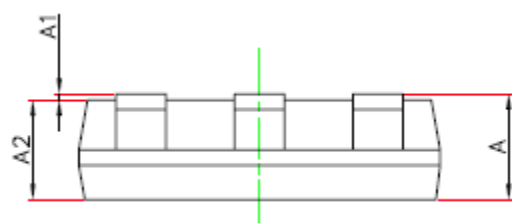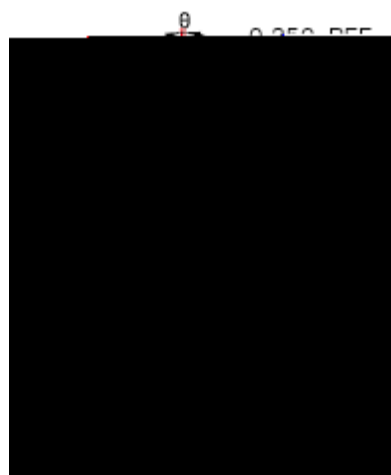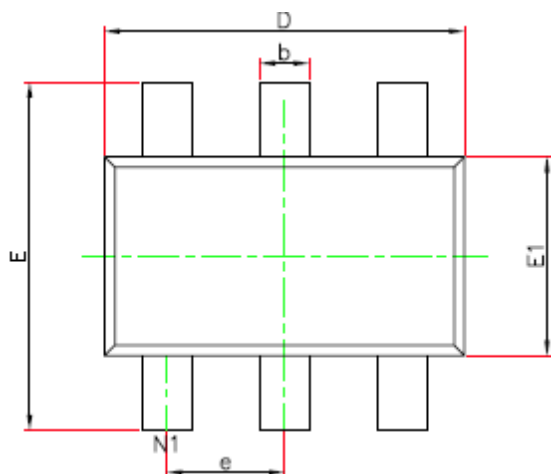


PACKAGE INFORMATION SOT

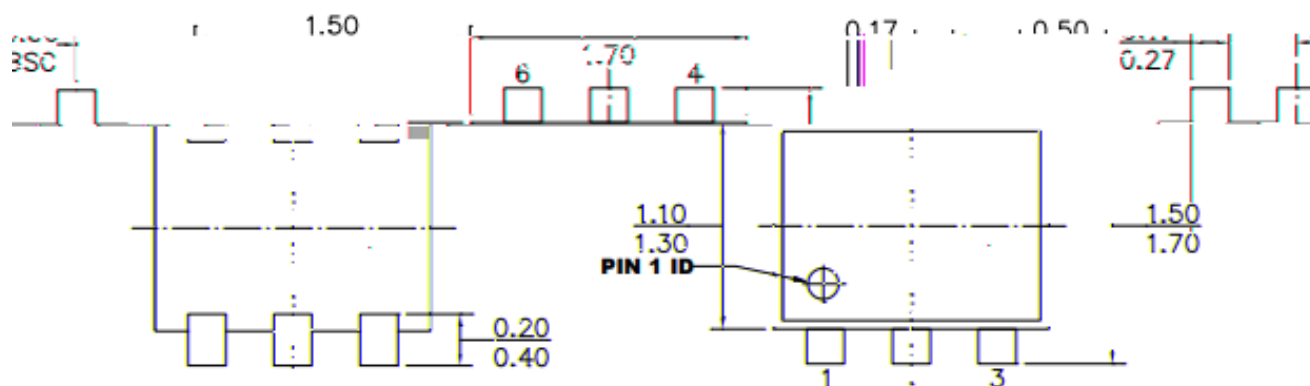

BOTTOM VIEW

TOP VIEW

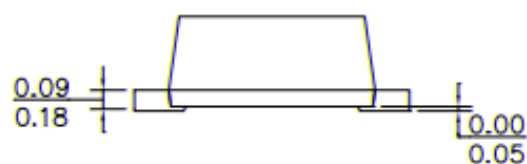


2152

AIRLINES

2014年11月21日

P R O R T W

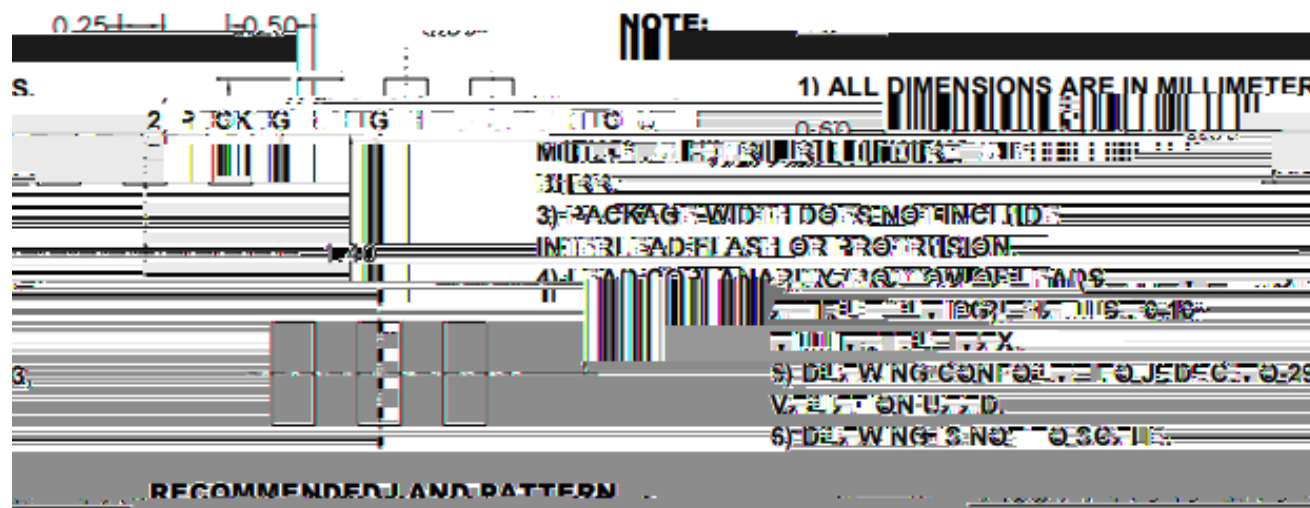

TAPE AND REEL INFORMATION

